

FIG. 1  
PRIOR ART

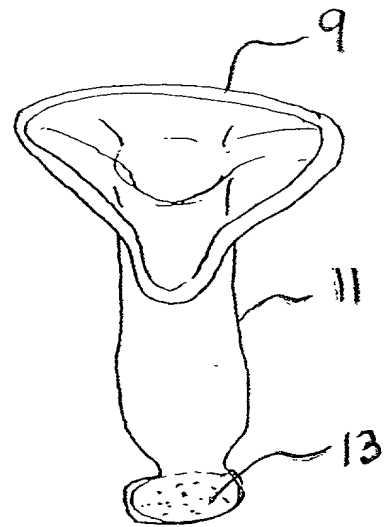


FIG. 2  
PRIOR ART

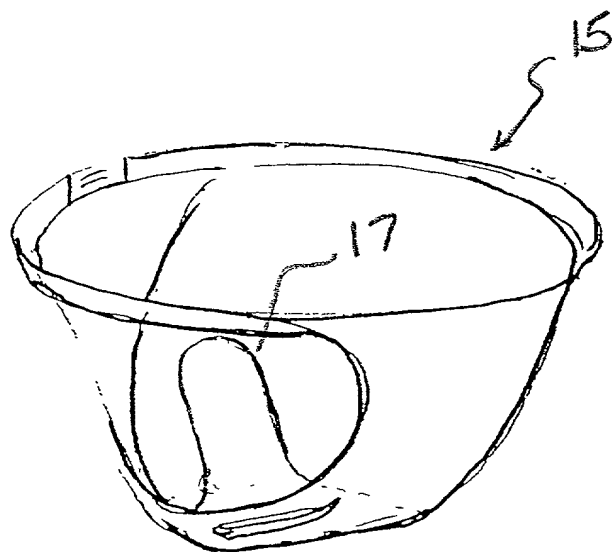


FIG. 3  
PRIOR ART

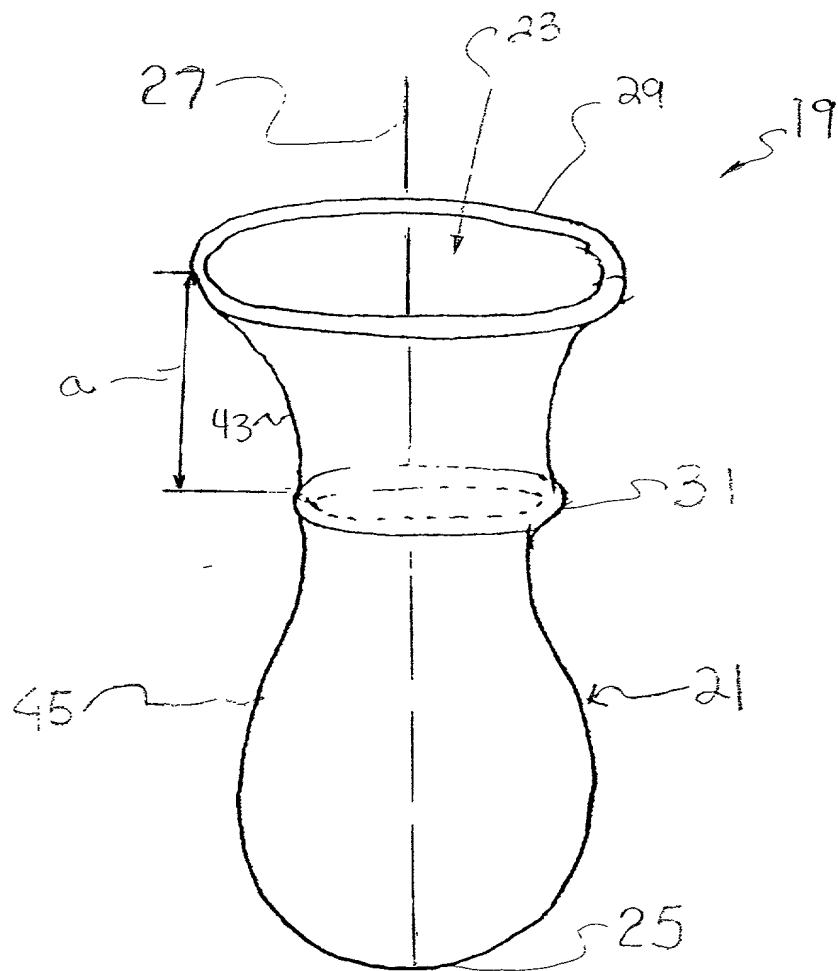


FIG 4

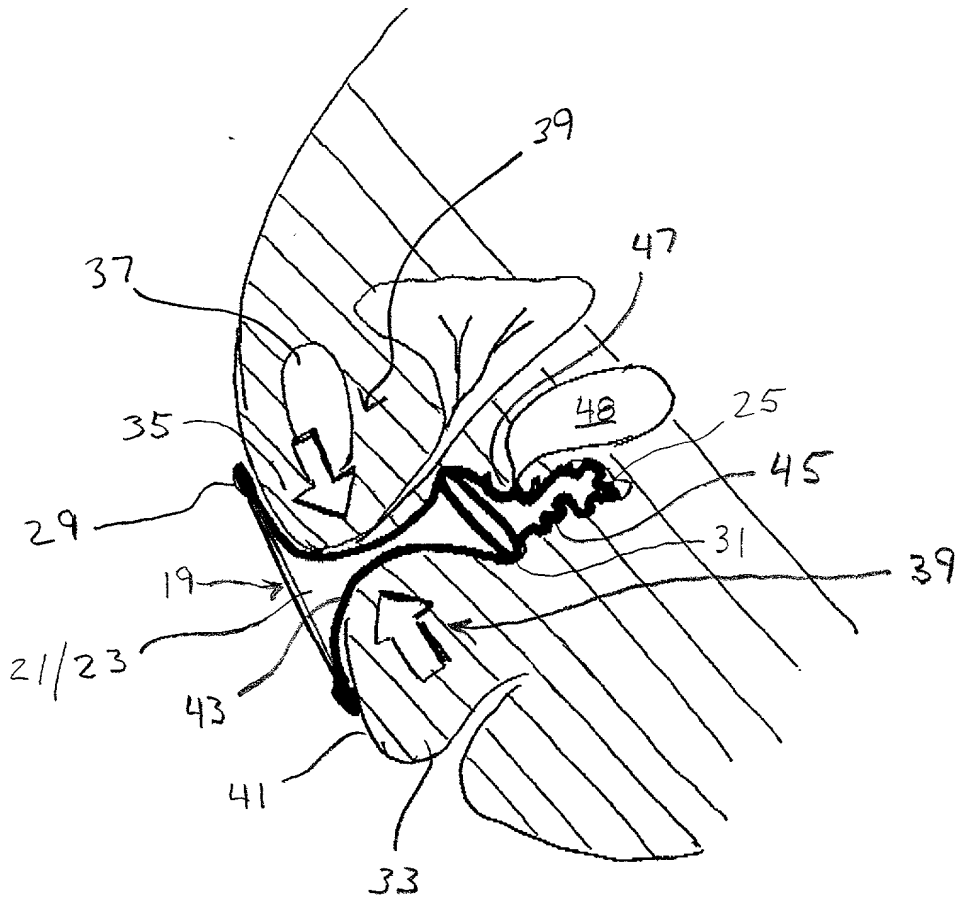


FIG. 5




FIG 6A




FIG 6B




FIG 6C




FIG 6D




FIG 6E




FIG 6F



FIG 6G




FIG 6H



FIG 6I




FIG 6J




FIG 6K




FIG 6L

31












FIG 6M

FIG 6A-FIG 6M

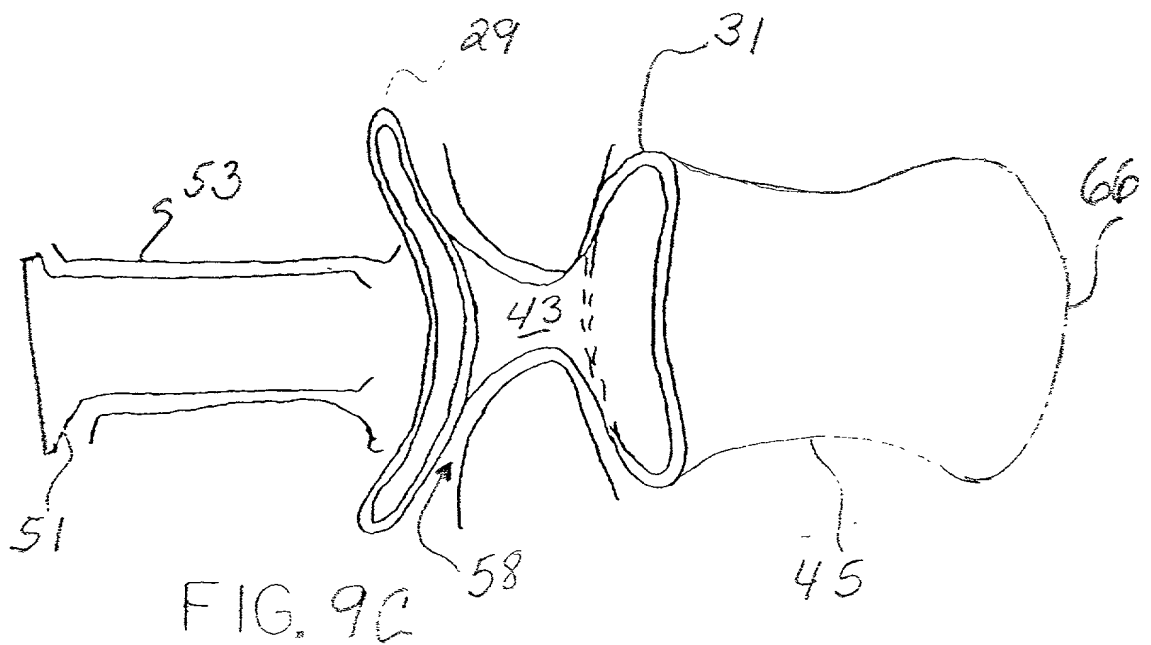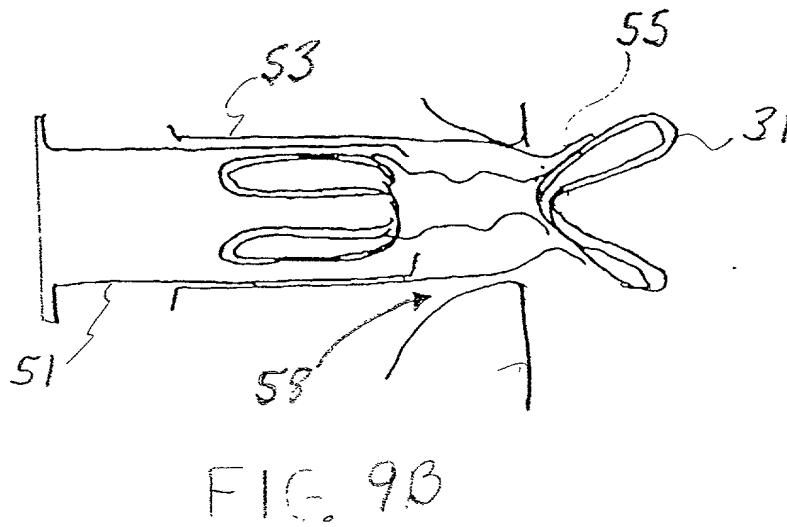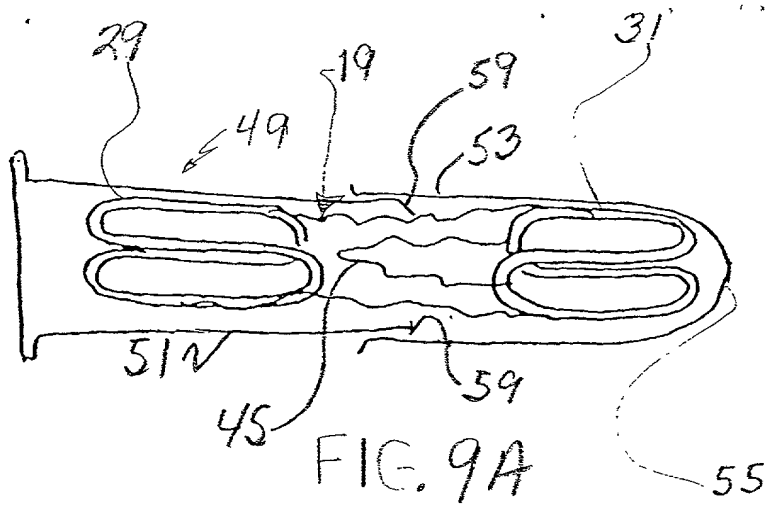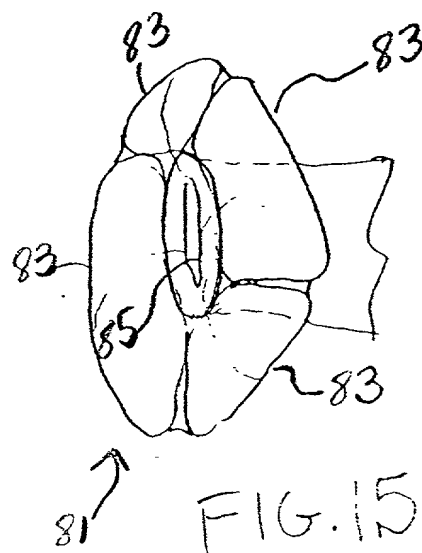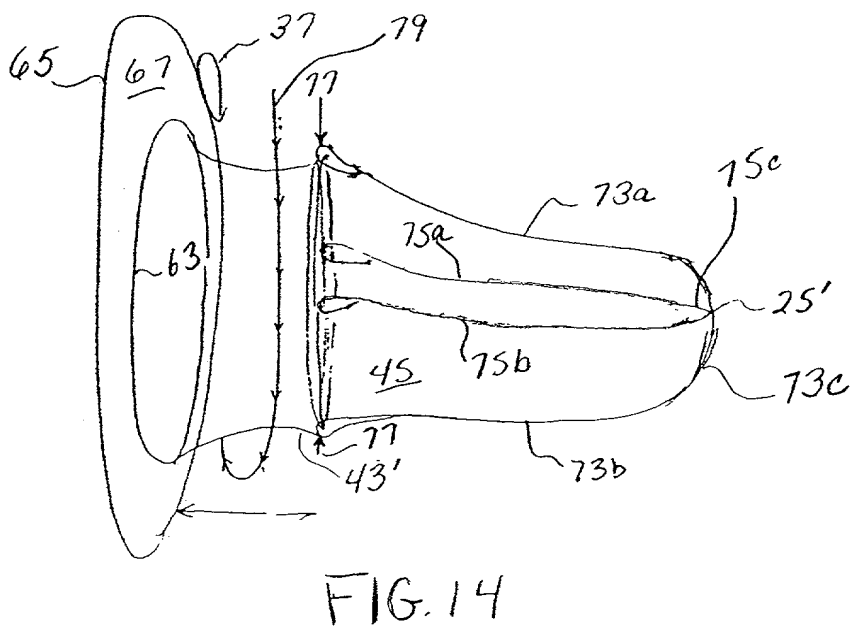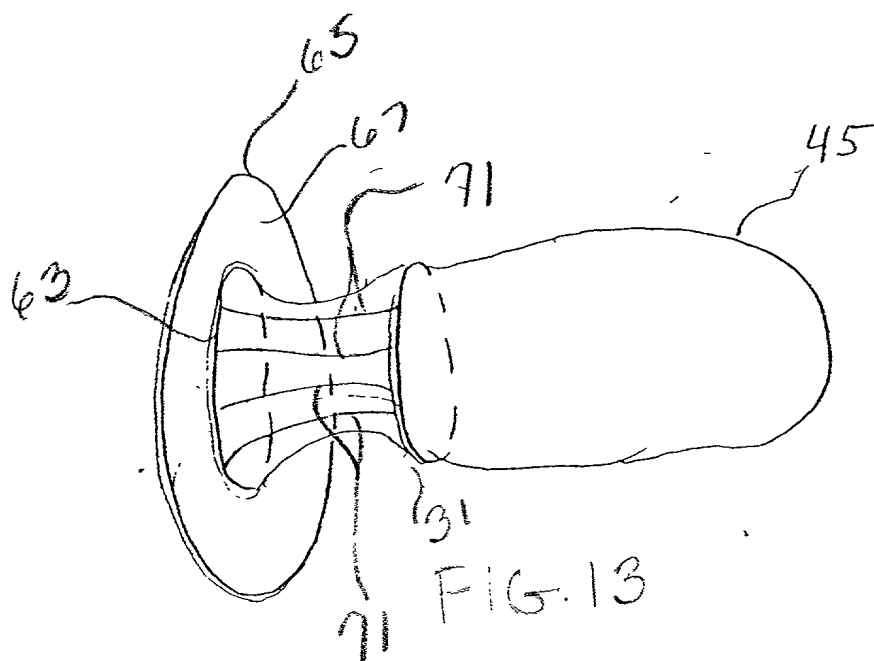

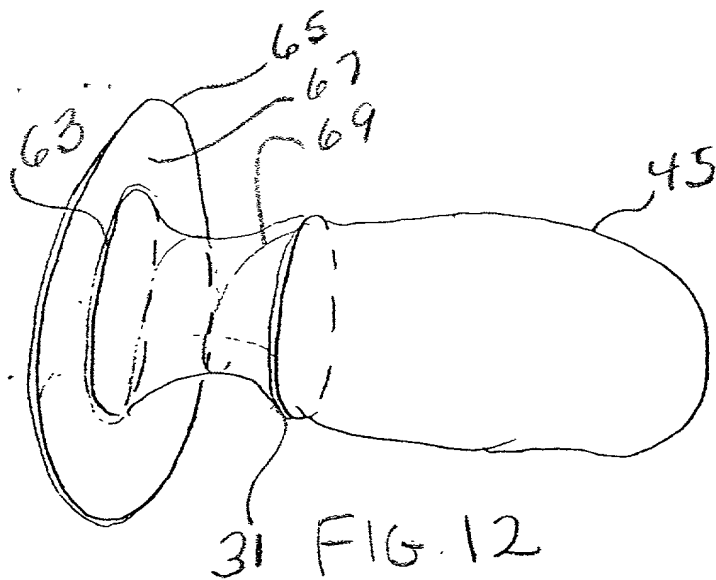

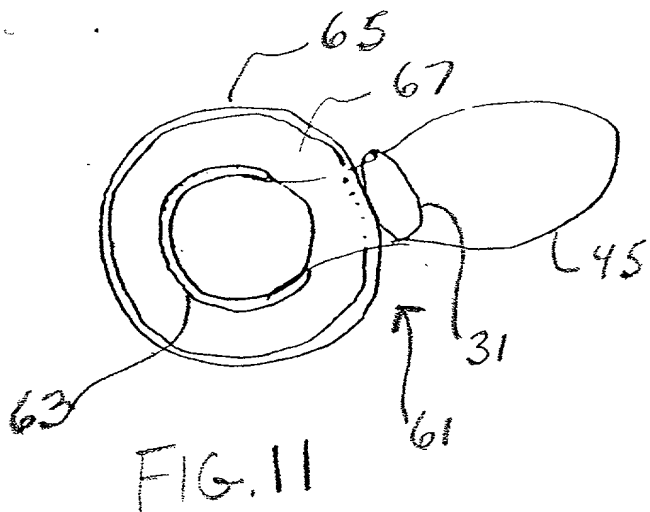

10000000-91012660

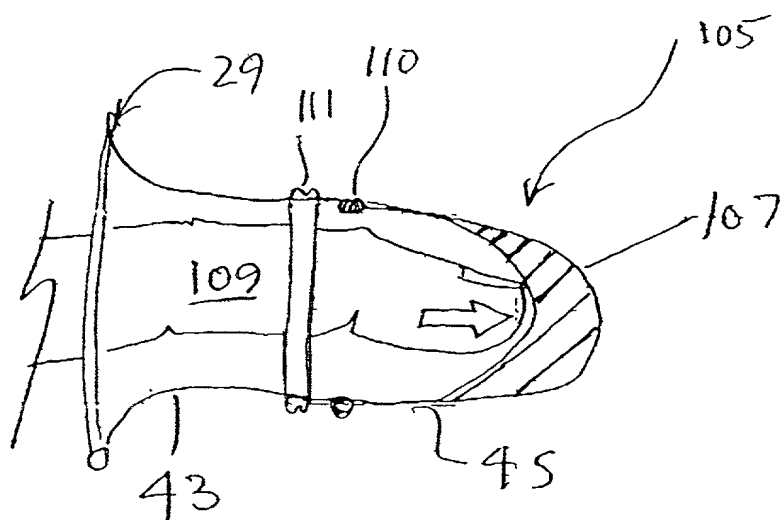
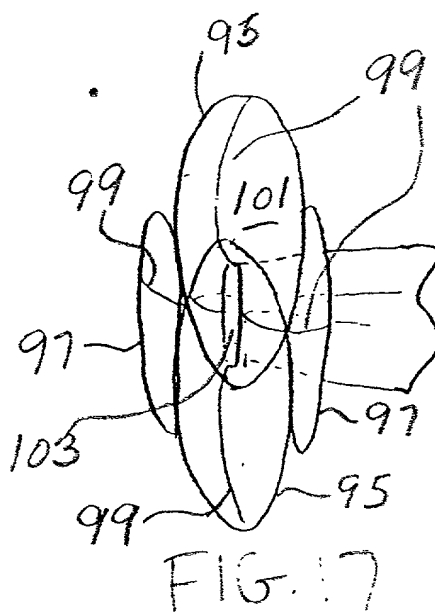
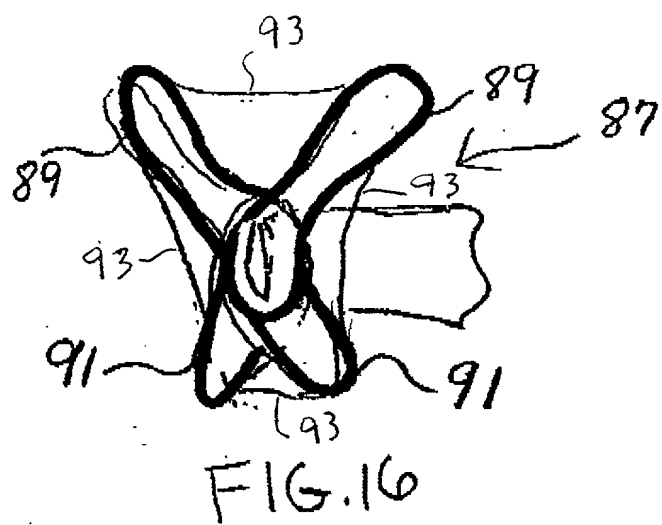








FIG. 1 is a perspective view of a rectangular container 115. The container has a top edge 116 and a side wall 115.

FIG. 10 is a perspective view of a second embodiment of the device. It shows a U-shaped structure with a central opening. A small rectangular feature is located on the inner surface of the structure. The feature is labeled with the reference numeral 131. The entire structure is labeled with the reference numeral 93.

FIG. 27